



Topfix[®] Max

Horizontal sunprotection with Fixscreen[®] technology for large surfaces

Topfix® Max

Horizontal sun protection which covers extremely large surfaces. Its combination with the integrated tension system results in an exceptional fabric tension. Flapping and ruptured fabrics are a thing of the past. Topfix Max prevents overheating in rooms with large light panels, skylights and in conservatories. Complete blackout is possible by means of blackout fabrics whether used inside or outside – even up to 30 m².

Product

- Horizontal sun protection for inside or outside use with revolutionary fabric tension
- Thanks to the patented Smooth Technology the Topfix® Max results in a smooth and quiet operation due to the patented co-extruded wear-resistant top coating:
 - Guarantees a fixed fabric without wrinkles
 - Fabric in every position wind tight: up to 120 km/h
- Surfaces up to 30 m²
- Motor control
- Anodised or powdercoated profiles available in any RAL colour
- Soltis® polyester fabric available in a very wide range of colours
- Fabrics:
 - Soltis® 86: no minimum angle of inclination
 - Soltis® 92 and B92: minimum angle of inclination 8°

Applications

- For all kinds of horizontal, vertical or inclined glazing such as roof windows, light panels, conservatories, etc.
- Suitable for inside and outside use
- For all window types: aluminium, wood, PVC
- For new buildings as well as renovation projects
- For private homes and public buildings: hospitals, care homes, offices, schools, etc.
- Topfix® Max F (freestanding version): can be integrated into open wooden, aluminium on steel structures with or without assembly feet.

Technical features


- Maximum dimensions:
 - Single: maximal width (W): 5000 mm
 - maximal prolongation (P): 6000 mm
 - maximal surface: 30 m²
- Aluminium casing: H 260 mm x D 202 mm
- Angle of inclination: 0° until 90°
- Top-Bottom or Bottom-Top mounting

Guarantee


- 5 year product warranty
- 10 year color coating warranty
- In accordance with EN 13561, wind class 3
- Declaration of performance (DOP) 201409-F006




Topfix® Max



Topfix® Max F

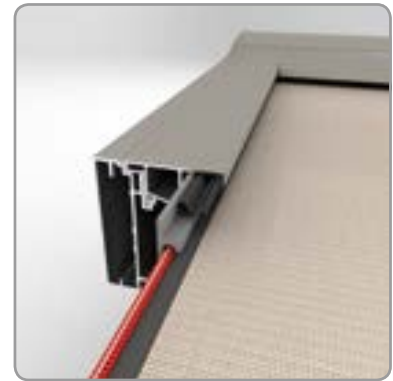

Side channel with Fixscreen Technology

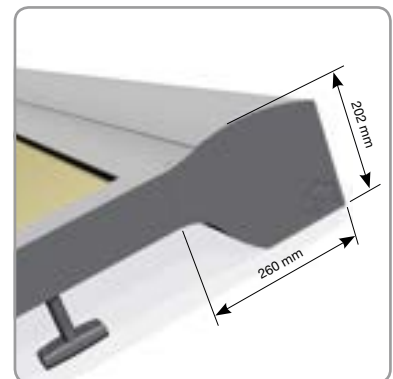

Box



RENSON® reserves the right to make technical changes to the products shown. The latest brochures may be downloaded from www.renson.eu

RENSON® Export Department • Tel. +32 (0)56 62 71 04 • export@renson.net

RENSON® Headquarters
IZ 2 Vijverdam • Maalbeekstraat 10 • 8790 Waregem • Belgium
Tel. +32 (0)56 62 71 11 • Fax +32 (0)56 60 28 51
info@renson.be • www.renson.eu

RENSON® Fabrications LTD
Fairfax Units 1-5 • Birchholt Road • Parkwood Industrial Estate • Maidstone • Kent ME15 9SF
Tel. 01622/754123 • Fax 01622/689478
info@rensonuk.net • www.renson.eu



Creating healthy spaces